MAJUMUDA

CONSULT . SALES . RENT . SERVICE

Specialize in using the latest VFC technology for Tower cranes, passenger and material hoists, and mast climbers.

QP7023-10T

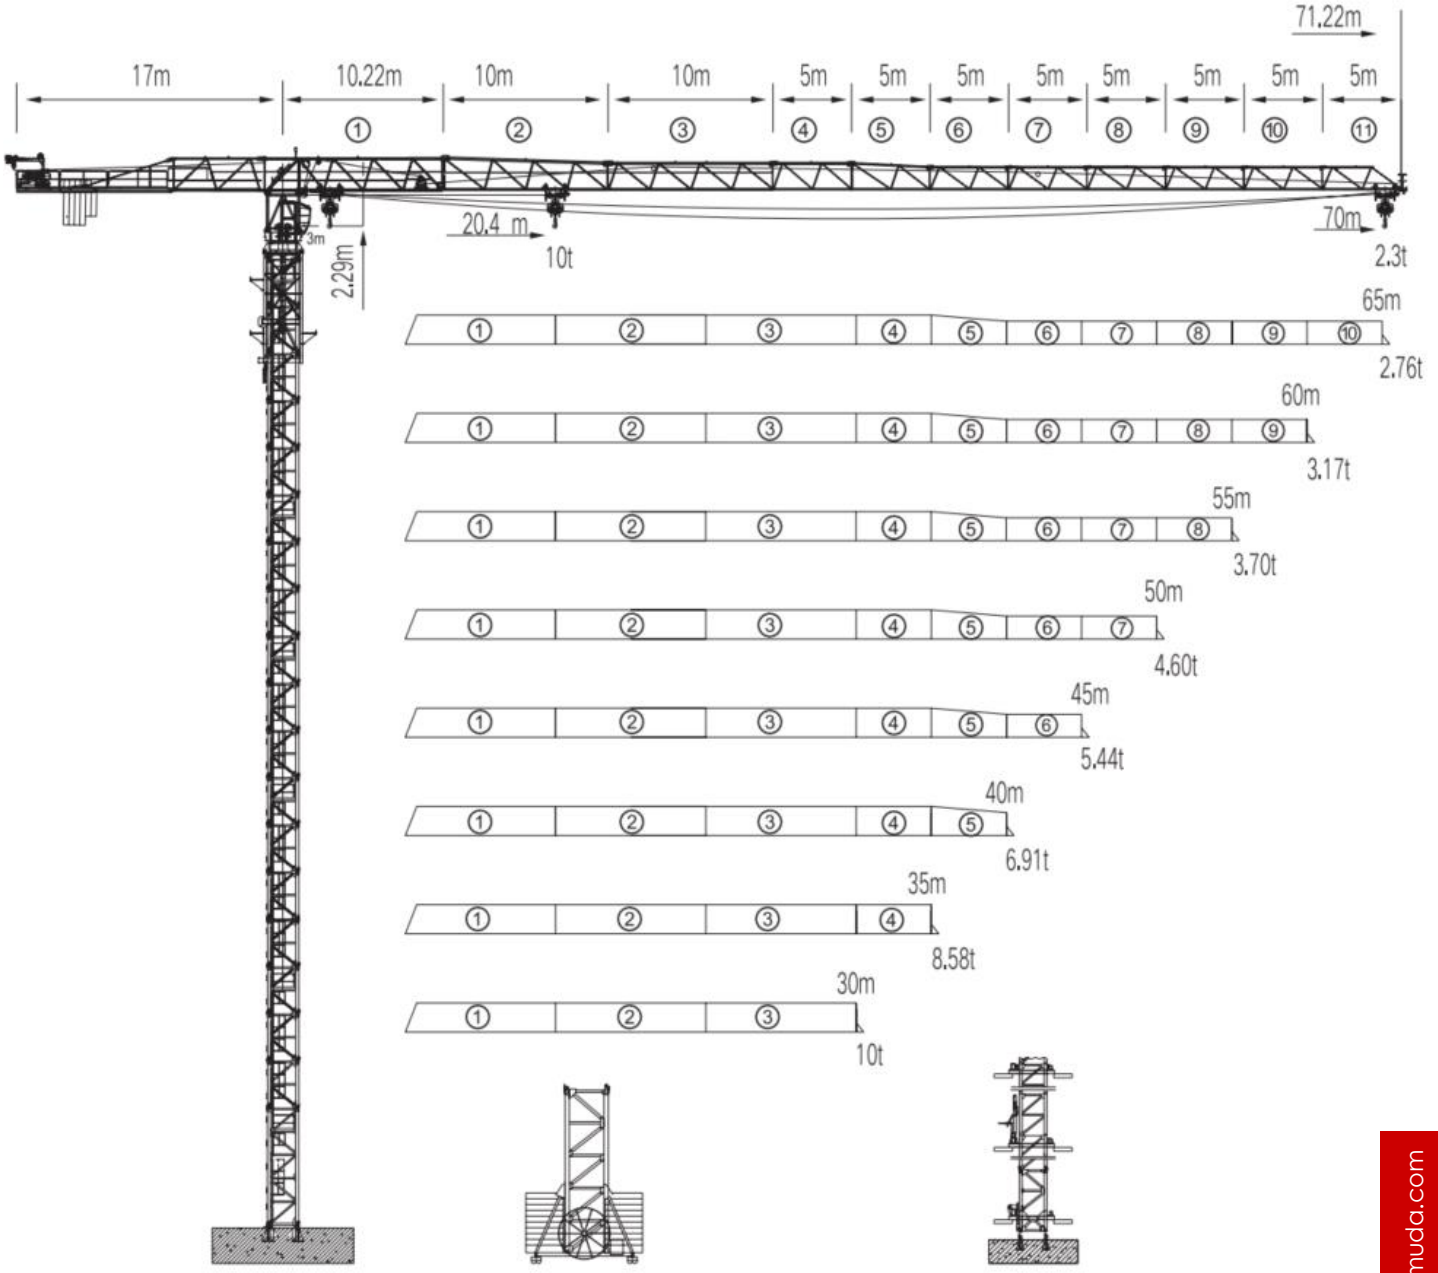

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding For any technical information, please refer to the corresponding instructions.

www.majumuda.com

MAJUMUDA (M) SDN BHD

Tel: +603 4023 1880 / 603 4024 1880
Fax: +603 4023 1890 / 603 4024 1870
Mobile: +6019 315 2532 (Eric)
Email: enquiry@majumuda.com

QP7023-10T

載荷表 | Load Diagrams

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~20.4	22	25	27	30	32	35	37	38.3	40	42	45	47	50
70m	IV	起重量 Load(t)	10	9.22	7.98	7.3	6.45	5.98	5.36	5.01	4.8	4.55	4.28	3.91	3.7	3.41
	II		5									4.75	4.48	4.11	3.9	3.61

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55	57	60	62	65	67	70
70m	IV	起重量 Load(t)	3.23	2.99	2.84	2.64	2.52	2.35	2.25	2.10
	II		3.43	3.19	3.04	2.84	2.72	2.55	2.45	2.30

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~21.6	22	25	27	30	32	35	37	40	40.58	42	45	47	50	52	55	57	60	62	65
65m	IV	起重量 Load(t)	10	9.83	8.51	7.8	6.9	6.4	5.75	5.37	4.88	4.8	4.6	4.21	3.98	3.67	3.49	3.23	3.08	2.87	2.74	2.56
	II		5										4.8	4.41	4.18	3.87	3.69	3.43	3.28	3.07	2.94	2.76

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~22.2	25	27	30	32	35	37	40	41.6	42	45	47	50	52	55	57	60
60m	IV	起重量 Load(t)	10	8.76	8.03	7.11	6.59	5.93	5.54	5.04	4.8	4.74	4.35	4.12	3.8	3.61	3.35	3.19	2.97
	II		5									4.94	4.55	4.32	4.00	3.81	3.55	3.39	3.17

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~23	25	27	30	32	35	37	40	42	43	45	47	50	52	55
55m	IV	起重量 Load(t)	10	9.11	8.35	7.4	6.86	6.17	5.78	5.26	4.95	4.8	4.54	4.3	3.97	3.77	3.5
	II		5										4.74	4.5	4.17	3.97	3.7

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~24.9	25	27	30	32	35	37	39.95	42	45	46.7	47	50
50m	IV	起重量 Load(t)	10	9.97	9.14	8.11	7.53	6.79	6.36	5.8	5.46	5.02	4.8	4.76	4.40
	II		5											4.96	4.6

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~26.6	27	30	32	35	37	40	42	45
45m	IV	起重量 Load(t)	12	9.85	8.75	8.13	7.33	6.87	6.27	5.91	5.44
	II		5								

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~28.9	30	32	35	37	40
40m	IV	起重量 Load(t)	10	9.60	8.93	8.06	7.56	6.91
	II		5					

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~30.5	32	35
35m	IV	起重量 Load(t)	10	9.49	8.58
	II		5		

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~30
30m	IV	起重量 Load(t)	10
	II		5

www.majumuda.com

MAJUMUDA (M) SDN BHD

Tel: +603 4023 1880 / 603 4024 1880
Fax: +603 4023 1890 / 603 4024 1870
Mobile: +6019 315 2532 (Eric)
Email: enquiry@majumuda.com